

Brief Introduction


This is a series of motors based on the rectangle shape enclosed gearbox. Gearbox thickness is not changeable. Motor can be any type but most popular motors are those that the diameter is approx. 32mm. Gearbox spindle has a key-way for fixing a rotating subject. Switch, cam are equipped inside of the gearbox. All the gears are metal and hardened for rusty-proof.



Main Application

Specialized for 8, 15, 20 and 25 caliber intelligent water meter.

Outline Drawing

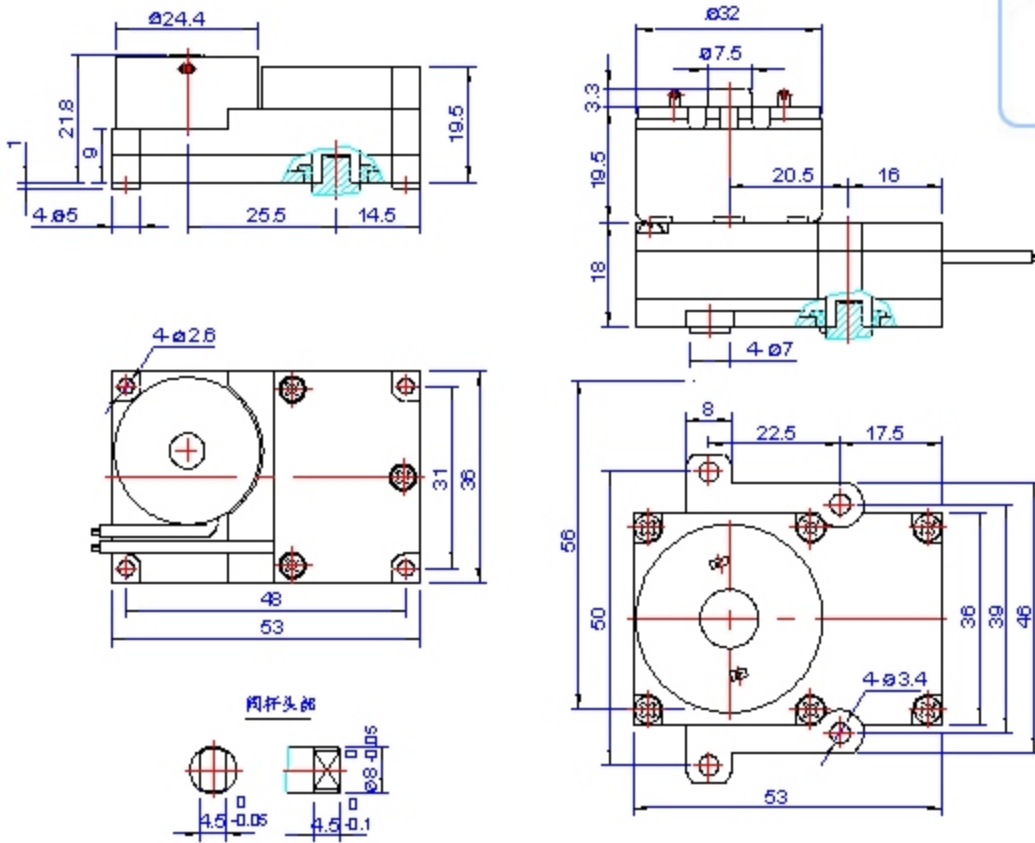

Gear Reduction Ratio can be 1:1960, 1:2000, 1:2560, etc.

Specifications

Serial No.	Model	Rated Voltage	No Load		At Rated Torque				Max. Torque Permitted
			Speed	Current	Speed	Torque	Current	Output	
		V	rpm	mA	rpm	kgcm	mA	mW	Kgcm
36GW300	11400-1960	3	1.7	40	1.5	*3.0	50	46	30
36GW500	28180-2000	3	1.4	50	1.3	*3.0	65	40	60
					1.2	*6.0	85	75	

Remarks: The above specifications are just for some typical models. Other specifications are welcome.